




Model No.	Type	Hose Diameter & Length	Height (A in mm)	Width (B in mm)	Depth (C in mm)	Min.Cabinet size (W x H x D) in min	Certificate
CSJR-04	Automatic & Swing	25mm x 30m	570	580	300	700x700x330	LPCB
CSJR-04-D	Automatic with Manometer	25mm x 30m	570	580	300	700x700x331	

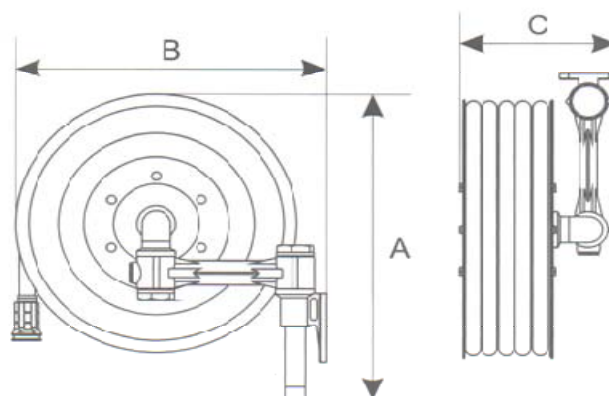

Certificate of Product Approval

Certificate Number: 1038a

Issue: 05

Suzhou HLC Plastics Industry Co., Ltd.

No. 103 Fengbeidang Road
Beiqiao Block
Xiangcheng District
Suzhou
China

is certified by BRE Global Ltd. and is authorised to use the LPCB mark in association with the product(s) listed in this certificate and appendix having complied with the requirement(s) of the standards as detailed below:

Products

'CSJ' Fire Hose Reels, Single Door Cabinets and Double Door Cabinets
(Refer to attached appendix for details)


Standards

EN 671-1:2012
Fixed firefighting systems: Hose systems: Hose reels (with semi-rigid hose)





มีเกจวัดแรงดัน ทำให้ง่ายต่อการตรวจสอบเช็ค ว่ามีน้ำและแรงดันภายในระบบน้ำดับเพลิง ทำให้รู้ได้ทันทีว่าพร้อมใช้งานเมื่อเกิดเหตุหรือไม่

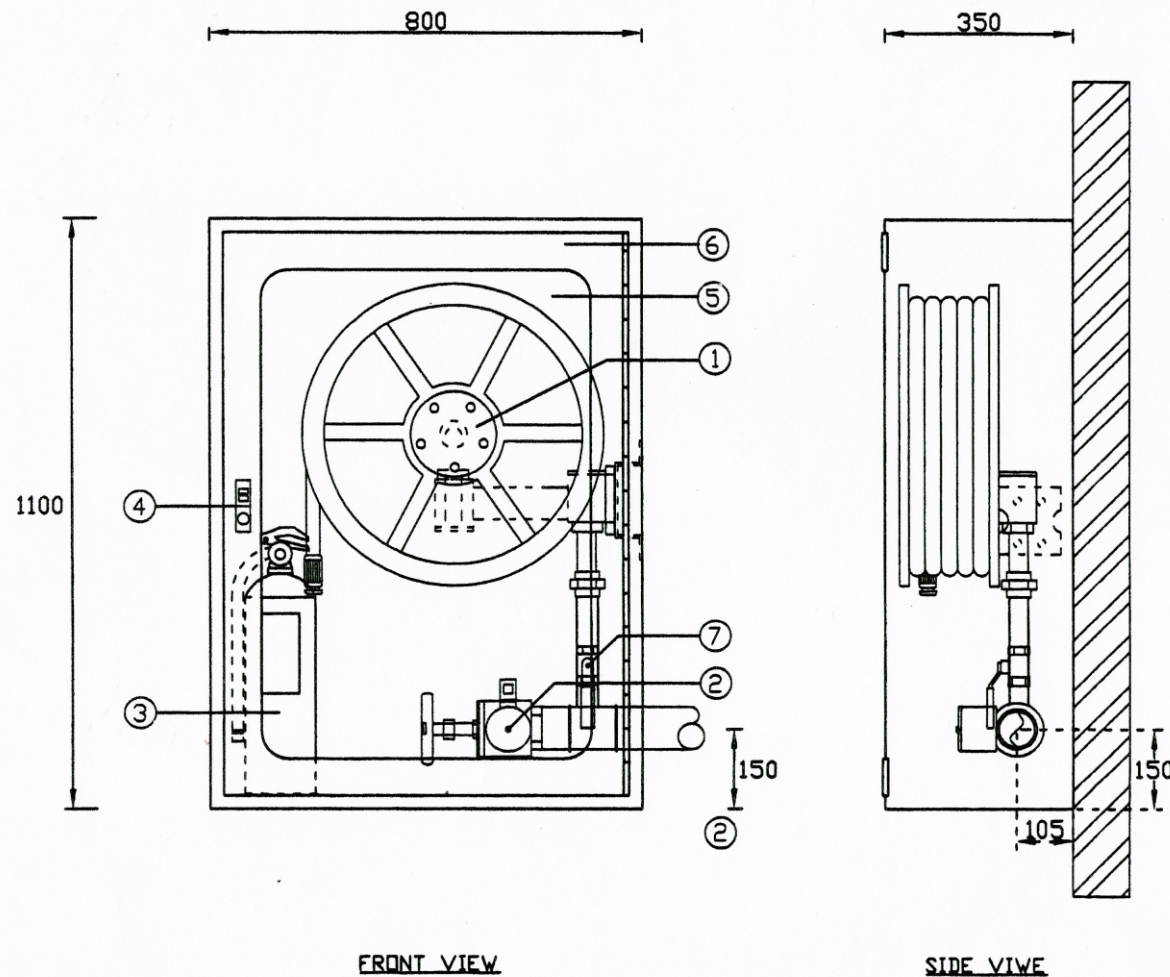

FIRE HOSE CABINET SURFACE TYPE

1. AUTOMATIC RESESS SWING HOSE REEL TO BS EN COMPLETE WITH 25MMx30M AND 6MMx25MM NOZZLE.
2. 2 $\frac{1}{2}$ ' UL/FM BRASS FIRE DEPARTMENT ANGLE HOSE VALVE WITH 2 $\frac{1}{2}$ ' CAST BRASS BS INSTANTANEOUS COUPLING ADAPTOR WITH CAP & CHAIN
3. ABC DRY CHEMICAL (AMMONIUM PHOSPHATE BASE) FIRE EXTINGUISHER 10 LB. AS SPECIFIED AND APPROVED TO TIS 332-1994.
4. PUSH-TO-OPEN DEVICE, LOCKABLE, KEYED ALIKE, FINISHED CHROME
5. SEFTETY GLASS 4MM THICK DOOR-PANE.
6. SURFACE TYPE CABINET MADE OF 16 GAUGE STEEL WITH STEEL FRONTDOOR FERAM HINGED CONTINUEOUSLY (PIANO HINGE), WITH PUSH-TO-OPEN LOCKABLE DEVICE, KEYED ALIKE CABINET SHALL BE CLEANED & COATED WITH PHOSPATE SOLUTION PRIOR TO BEGIN BAKED-ON RED.
7. 1' BRASS BALL VALVE, UL/FM



**FIRE KILLER
GROUP**

FIRE KILLER ENGINEERING CO., LTD.

PROJECT : FIRE HOSE

DROWN BY : NOT TO SCALE